



POWDER LEVEL CONTROLLER PLT

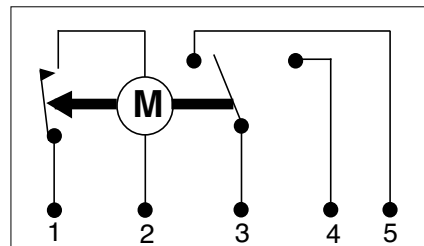

- The gauge can be fitted into any type of silo or container.
- When the container is empty the propeller is moved by a keyed motor free on shaft.
- The propeller stops when blocked by a solid body and lets the motor turn until it switches off a micro-contact.
- An alarm-signal can be connected to the micro-contact.
- The propeller starts running again when the descending level of the solid body lets it free and the micro-contact is switched on.
- The carcass is completely water-proof and guarantee the working of the machine also in the open air.
- The motor runs at all required voltages (we recommend the 220 V. 50 Hz. single phase).
- The micro-contact works at 380 and 220 V. 15 A. and be connected to any kind of control-system.
- The installation and the connections of the device are very simple.
- If requested all the circuit diagrams with the various possibilities can be supplied.

CODE	TYPE	"L"
510 010	PLT 1	95
510 011	PLT 1R	95
510 020	PLT 2R	190
510 030	PLT 3R	315
510 040	PLT 4R	500
510 050	PLT 5R	1000

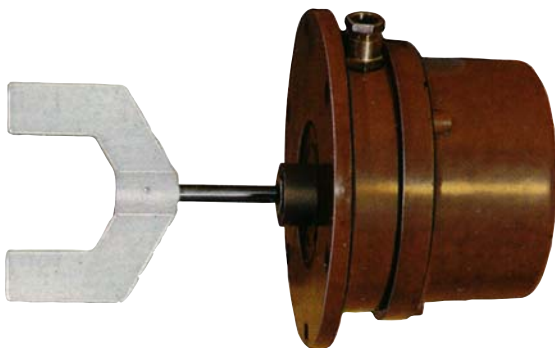

BAMO MESURES

22, Rue de la Voie des Bans - Z.I. de la Gare - 95100 ARGENTEUIL
Tél : (+33) 01 30 25 83 20 - Web : www.bamo.fr
Fax : (+33) 01 34 10 16 05 - E-mail : info@bamo.fr

POWDER LEVEL
CONTROLLER
PLT

DOC

510/1