

# Float level regulator NIVOSTOP® ECO



- For clear, non-aggressive liquids
- Economic model, easy to install
- Switching angle: 45°
- Regulation between 2 levels
- PVC cable, 10 m long

## APPLICATIONS

Level control of non-aggressive liquids:

- Automatic start and stop of a pump
- High and low level alarms
- Opening and closing a valve

## DESCRIPTION

NIVOSTOP® ECO is suitable for neutral environment conditions (clear water, rain water, etc.)

Against the movement of the liquid, tilting of the float actuates a contact (output cable to connect to a control cabinet).

## TECHNICAL FEATURES

Pressure limit	1 bar max.
Protection	IP68
Body	PP (Polypropylene)
Cable	PVC, 10 m long; 3x1 mm <sup>2</sup> (Ø 8.8 mm)
Temperature	+5 ... +60 °C
S.G. Limits	0.95 ... 1.05
Switching angle	45°
Switch	Change-over microswitch
Switching power	20 A resistive load; 8 A inductive load; 250 V AC
Counterweight	230 g (included)


### Caution

The tank (in fact the liquid) must be connected to earth, otherwise the detection loop must be in low voltage, safe low current.



## CODE NUMBER AND REFERENCE

Code	Reference	Description
522 700	NIVOSTOP ECO 10	NIVOSTOP ECO; Cable 10 m; Counterweight

## DIMENSIONS

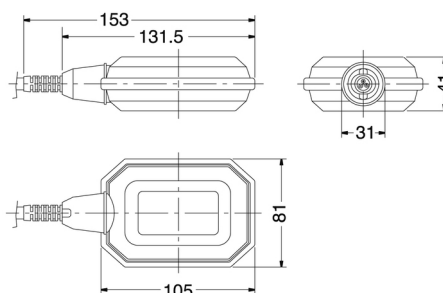

Counterweight  
(included)



Installation

# BAMO MESURES

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web [www.bamo.fr](http://www.bamo.fr)

Fax +33 (0)1 34 10 16 05 E-mail [info@bamo.fr](mailto:info@bamo.fr)

Float level regulator  
NIVOSTOP® ECO

13-11-2018

D-522.07-EN-AB

NIV

522-07 /1