

SPARE PARTS SFA Line

Code	Reference	Designation
583 200	SFA/T	Pulley for guiding tube, PP and stainless steel right angle fixed on PVC tap
583 250	SFA/R	Pulley for tank, PP and St steel right angle
583 260	SFA/TR/PLAS	Set of 2 pulleys all in plastic, 1 for guiding tube and 1 for tank, PP / PVC
583 760	PE/SFA	Pulley to glue on tube; gas tight model, DN 32



SFA/T

* To be fixed with 2 screws
(not included)



SFA/R *



SFA/TR/PLAS



PE/SFA

Code	Reference	Designation
583 212	FI/102/SFA	Stainless steel 316 L float, sphere Ø 102 with ballast
583 300	FI/200/SFA	stainless steel 316 L float, standard type, Ø 200, ballast to fill with sand
583 370	FP98/SFA	PPH float, Ø 98, height 110 mm, for use with counterweight CP63 and CP50
583 374	FP90/SFA	PPH float, Ø 90, height 100 mm, for use with counterweight CP40/SFA



FI/102/SFA



FI/200/SFA



FP98/SFA



FP90/SFA

Code	Reference	Designation
583 400	CP63/SFA	Counterweight with built-in magnet, PVC, Ø 50, for guiding tube Ø 63 x 57
583 401	CP50/SFA	Counterweight with built-in magnet, PVC, Ø 40, for guiding tube Ø 50 x 42.6
583 404	CP40/SFA	Counterweight with built-in magnet, PVC, Ø 32, for guiding tube Ø 40 x 34



CP63/SFA



CP50/SFA



CP40/SFA

Code	Reference	Designation
583 500	CIM/SFA	Stainless steel cable, AISI 316, Ø 1 mm, supplied to the desired length **
583 550	SC/SFA	St. steel clamp, AISI 316, for float with cable Ø 1 mm in St. steel
583 552	SCCP/SFA	St. steel clamp, AISI 316, for counterweight with cable Ø 1 mm in St. steel
583 560	CPM/SFA	PPH cable, Ø 3 mm, supplied to the desired length **
583 562	CPM2/SFA	Stainless steel cable PVC coated, Ø 3 mm, supplied to the desired length **
583 566	CT/SFA	PTFE cable, Ø 3 mm, supplied to the desired length **
583 570	TT/SFA	PVC tube, transparent, Ø 63 x 57 mm
583 575	CTB/SFA	Stainless steel Te with PE Collar Ø 63, for fitting on the tank



CTB/SFA

TT/SFA



CIM/SFA

SC/SFA



CIM/SFA

SCCP/SFA



CPM/SFA

** price
per metre

BAMO MESURES

22, Rue de la Voie des Bans - Z.I. de la Gare - 95100 ARGENTEUIL

Tél : (+33) 01 30 25 83 20 - Web : www.bamo.fr

Fax : (+33) 01 34 10 16 05 - E-mail : info@bamo.fr

SPARE PARTS SFA Line

28-04-2014

583 I1 03 J

NIV

583-03/1

583


SPARE PARTS SFA Line

LEVEL SWITCHES

Magnetically actuated switches with change over contact. They are bi-stable: their status does not change until the counterweight passes once more in front of the level switch.




Level switch BSM 501/63
(see data sheet 585-01)






Level switch BRK 60
(see data sheet 585-02)

GRADUATED RULERS

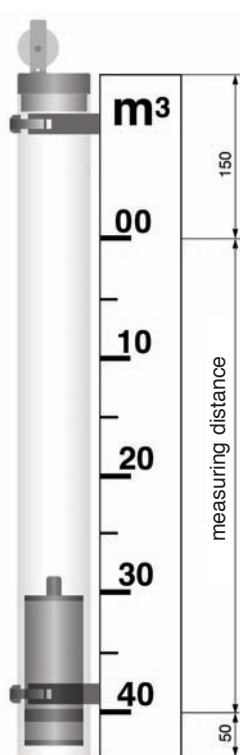

(Pic. 1)

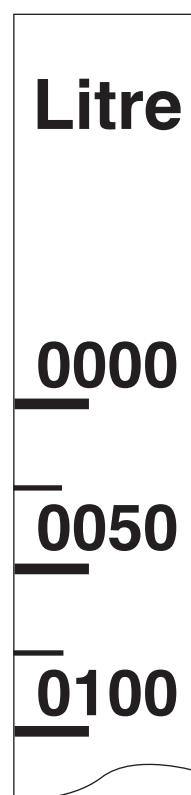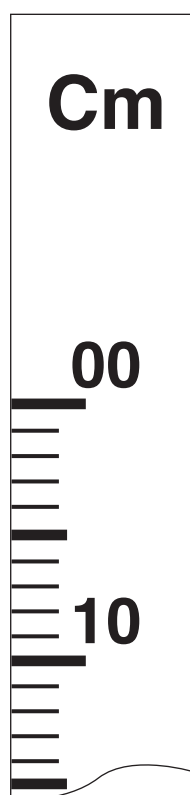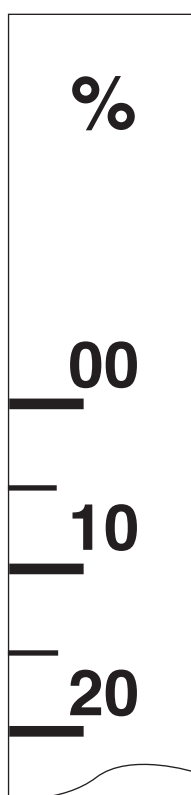

Scales [Unit]	[%], height in [cm], Volume, Mass/Weight
Material	White PVC – U type, 70 x 35 mm
Marks and signs	Black

Graduated Ruler over 4.60 m long:

Any ruler with a length over 4.6 m is delivered in two parts (the fitting for assemble is included). les.

Marks: As a standard, the ruler is graduated for a right side mounting on the guiding tube, (Pic. 1).
(on request: For a left side mounting).

A drawing for acceptance is submitted before we manufacture the ruler.

BAMO MESURES

22, Rue de la Voie des Bans - Z.I. de la Gare - 95100 ARGENTEUIL
Tél : (+33) 01 30 25 83 20 - Web : www.bamo.fr
Fax : (+33) 01 34 10 16 05 - E-mail : info@bamo.fr

SPARE PARTS
SFA Line

28-04-2014

583 I1 03 J

NIV

583-03/2