


Pt 100 Ω TEMPERATURE PROBE TS 12

- Pt 100 Ω at 0 °C
- Measure range from -50 up to 250 °C
- Wetted parts S.Steel 316 L
- Watertight junction

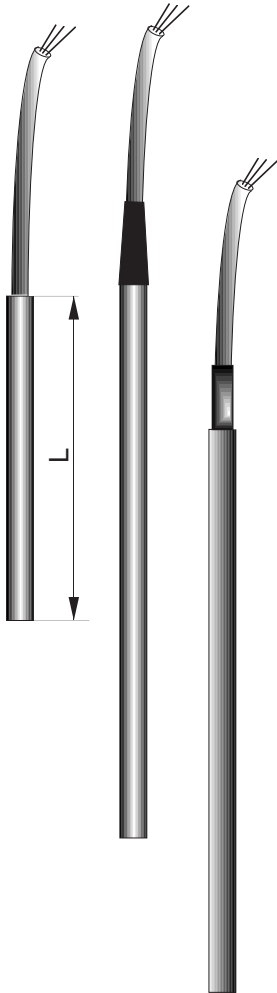

FEATURES

Connection

Without

0

Probe material

S.Steel 316 L

I

Plunger length

From 50 up to 500 mm

xxx

Plunger diameter

4,5 mm

04

6 mm

06

8 mm

08

Sensible element

Simple 3 wires

3

Simple 4 wires

4

Duplex 2x3 wires

6

Accuracy

Class A

A

Class B

B

Extension cable

PVC

P

PFA

F

Cable length

in meter(s)

xxx

TS 12

0

I

xxx

04

06

08

3

4

6

A

B

P

F

xxx

LIMITES of USING

PVC Cable	-10 up to 80 °C
PFA Cable	-50 up to 250 °C

TS 12	0	I					
-------	---	---	--	--	--	--	--

612

BAMO MESURES

22, Rue de la Voie des Bans - Z.I. de la Gare - 95100 ARGENTEUIL
Tél : (+33) 01 30 25 83 20 - Web : www.bamo.fr
Fax : (+33) 01 34 10 16 05 - E-mail : info@bamo.fr

TEMPERATURE PROBE
Pt 100 Ω at 0°C
TS 12

14/05/99

61211 01 A

DOC

612/1