


# Actuators for level switch controllers FLOATS – COUNTERWEIGHTS

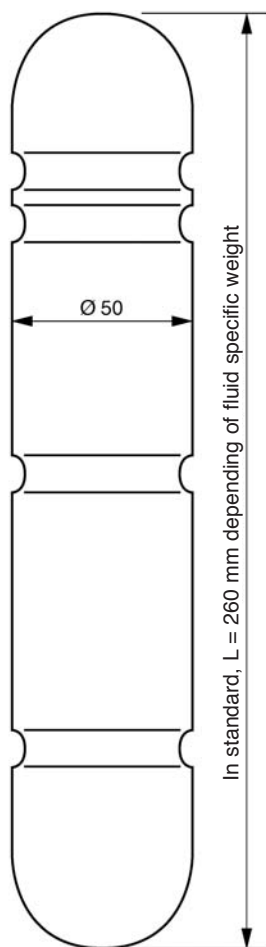

## PRINCIPLE

Our floats and counterweights have built-in magnets dedicated to work with our own level switch controllers.


## FLOATS – COUNTERWEIGHTS

Code	Reference	Ø mm	L mm	Ø into tube mm	Mass g
560 05.	Float MAGTOP std.	50	260	56,3	260
570 075	GNR 51 PPh	26	160	28	58
570 080	GNR 52 PPh	25	178	27	50
570 082	GNR 53 PVDF	26	165	27	80
570 085	GNR 62 PPh	50	130	56,4	166
583 403	CP / SFA / PVC	50	76	56,4	188


## HYSTERESIS in mm

Float	BRK 60	BSM 501	BRT
GNR 51	10	35	
GNR 52	10	28	
GNR 62	10	30	
CP/SFA	10	30	
MAGTOP	10		10


MAGTOP standard

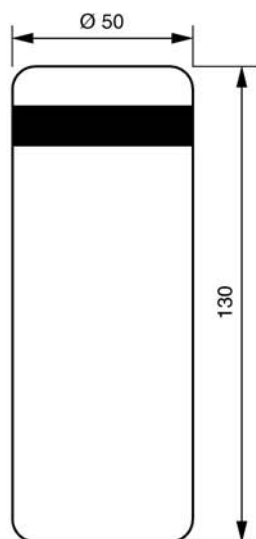

GNR 62

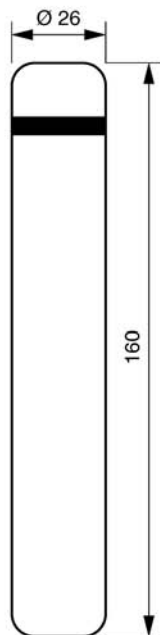


GNR 51

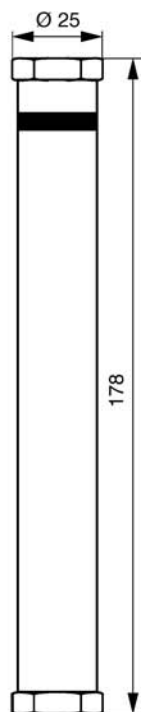

GNR 52

CP / SFA

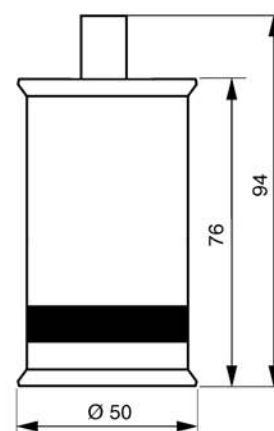

# BAMO MESURES

22, Rue de la Voie des Bans - Z.I. de la Gare - 95100 ARGENTEUIL

Tél : (+33) 01 30 25 83 20 - Web : [www.bamo.fr](http://www.bamo.fr)

Fax : (+33) 01 34 10 16 05 - E-mail : [info@bamo.fr](mailto:info@bamo.fr)

Actuators for level switch controllers

## FLOATS COUNTERWEIGHTS

04-10-2012

585 I1 03 I

NIV

585-03/1